


“Bolt-On” Lift System

“Bolt-On” Systems are the most popular configurations of Movotec® components - ideal for transforming static work surfaces into dynamic ones. These Lift Systems have four “Bolt-On” lift cylinders and are available in both hand-crank and motorized models.

System Includes

- A Crank or Motor Driven System
- Four “Bolt-On” lift cylinders
- Two 2.5m (8 ft.) and two 3m (10 ft.) sections of flexible tubing
- Four glides
- Drilling templates, tubing clips and cable ties
- Installation and operating instructions

Movotec® “Bolt-On” lift systems are readily available, shipped completely assembled and ready for installation.

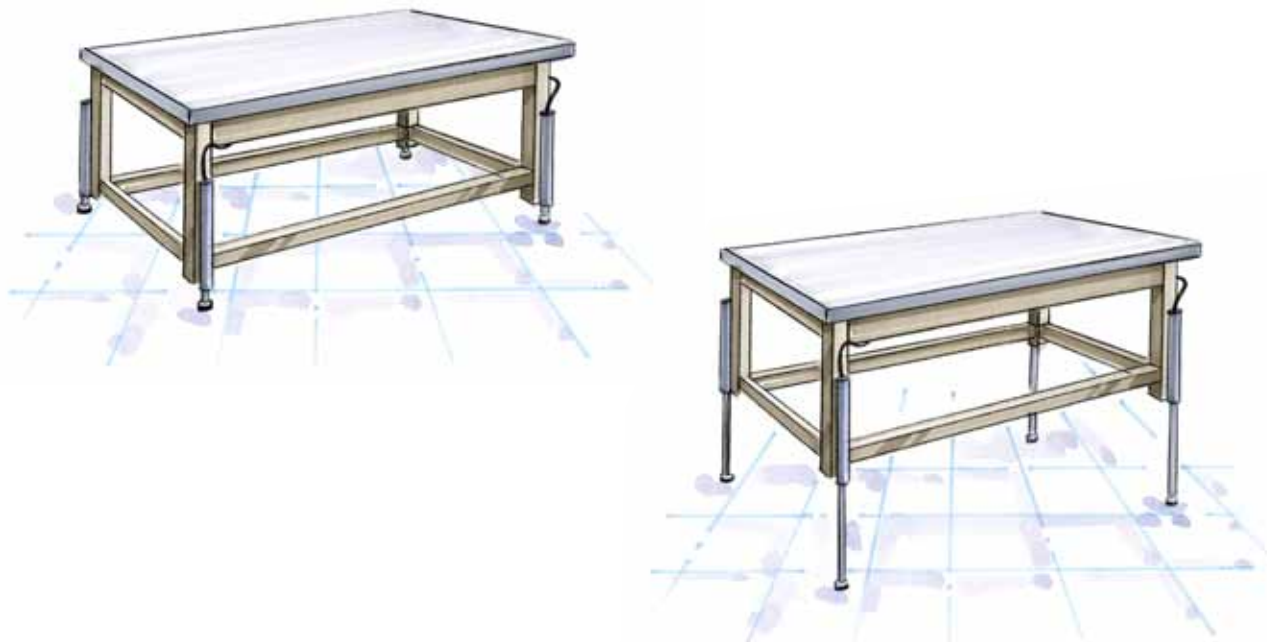

Lift System Dimensions

System Lift Capacity (kg / lbs.)	Adjustment Range* (mm / in.)	Crank-Driven System Part Number	Motor-Driven System (120V) Part Number	Motor-Driven System (230V)** Part Number	Includes Pump	Includes Cylinders (x4)
340 / 750	150 / 5.9	MLS-00001	MLS-00001E	MLS-00009E	Q4809	CB415
340 / 750	200 / 7.9	MLS-00002	MLS-00002E	MLS-00010E	Q4812	CB420
340 / 750	300 / 11.8	MLS-00003	MLS-00003E	MLS-00011E	Q4818	CB431
340 / 750	400 / 15.7	MLS-00004	MLS-00004E	MLS-00012E	Q4824	CB440
454 / 1000	150 / 5.9	MLS-00005	MLS-00005E	MLS-00013E	Q4612	CB415
454 / 1000	200 / 7.9	MLS-00006	MLS-00006E	MLS-00014E	Q4615	CB420
454 / 1000	300 / 11.8	MLS-00007	MLS-00007E	MLS-00015E	Q4623	CB431
454 / 1000	400 / 15.7	MLS-00008	MLS-00008E	MLS-00016E	Q4631	CB440
590 / 1300	150 / 5.9	MLS-00080	MLS-00080E	MLS-00084E	Q4615	CB615
590 / 1300	230 / 9.1	MLS-00081	MLS-00081E	MLS-00085E	Q4623	CB631
590 / 1300	300 / 11.8	MLS-00082	MLS-00082E	MLS-00086E	Q4631	CB631
590 / 1300	393 / 15.5	MLS-00083	MLS-00083E	MLS-00087E	Q4639	CB640

* The adjustment range is reduced for motorized systems by 6-8mm - Other adjustment ranges available upon request

** 230V System supplied with Schuko plugs